

# CN061

## USB to 2 x M.2 B-key 3042 or 3052 + 2 x SIM Slot Converter board

### Introduction:

CN061 is a USB 3.0 Signal extension board. It supports up to 2 x M.2 B key 3042 or 3052 Slots. The board communicates to the host PC via USB cables and powered from Motherboard CPO1 wafer. CN061 also supports 3G / 4G micro SIM slot (push-push)

TOP



### Features:

- Two M.2 B-key 3042 or 3052 size Socket
- Two Micro SIM PUSH-PUSH
- DC 12V to 3.3V or 3.7V


### Option:

1 x 1.25mm 1x5pin & 1 x 1.25mm 1x4pin for USB 3.0 / 2.0 extension.

### Specification:

Function	2 ports M.2 B-key 3042 or 3052 extension board
Interface	USB 3.0 / 2.0
SIM	2 Micro SIM Card (Push-Push)
USB Connector	1.25mm 1x4pin, 1.25mm 1x5pin
DC in Connector	2.0mm 1x4pin
Input Voltage	DC 12V
Operating Temperature	-40°C ~ +85°C
Dimensions	77.5 x 37 mm

### Mechanical Drawing:

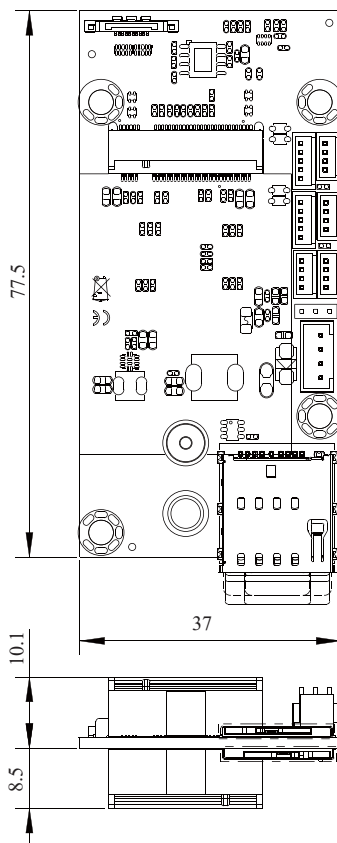

### Cable information:

6G6002-8026-0100 (option)

6G6003-7452-0100 L=15cm, 2.0 1\*4 / 2.0 1\*4

