


CIO308

4DI 4DO Board

Introduction:

Optocoupler SSR for 4DI & SSR for 2 DO, relay for 2DO (4 Optocoupler DI / 2 SSR DO + 2 Relay DO)

Top

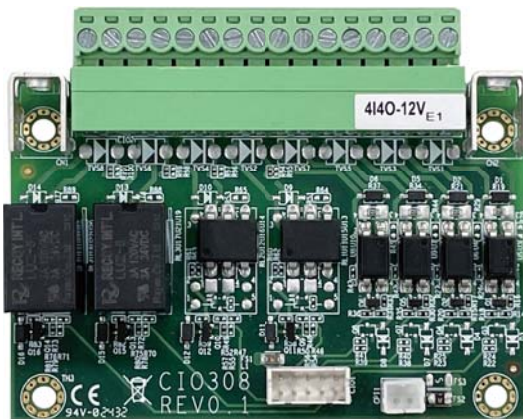

Features:

- Digital Input 3.3V~12V
- Power Relay Contact rating: DC 30V / 3A max, AC 125V / 3A max
- SSR Contact rating: DC 60V / 2A max, AC 60V / 2A max
- Optocoupler for Digital Input Isolation, Contact rating: DC 60V / 50mA max


Option:

- Digital Input voltage can select up to 24V or 48V
- Digital Output can select to DO0-DO3: SSR or Power Relay

Specification:


Function	4 Digital Input + 4 Digital Output
Interface	2 x 5 pin 2.0 wafer connector
Output	TB connector
Operating Temperature	-40°C ~ +85°C
Dimensions	77 x 35 mm

Mechanical Drawing:

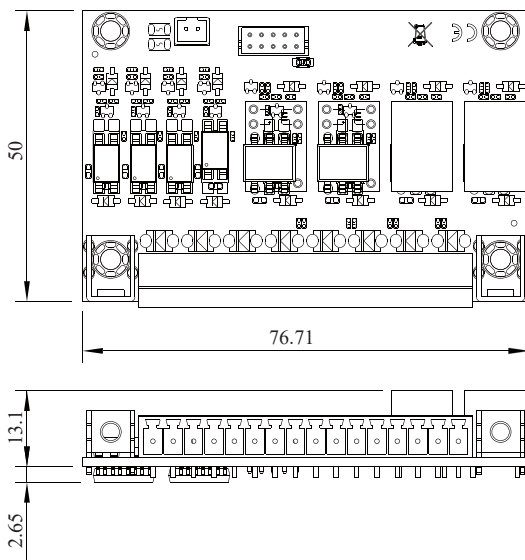


Ordering Information:

7G5905-1713001-0 CIO308-4I4O-12V-001

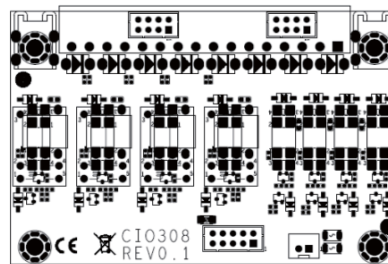


Cable information:

6G6001-0105-0100 L=15cm, 2.0 2 x 5 to 2.0 2 x 5



6G6003-7500-0100 L=30cm, 2.0 1 x 4 to 2.0 1 x 4 & 2.0 1 x 2

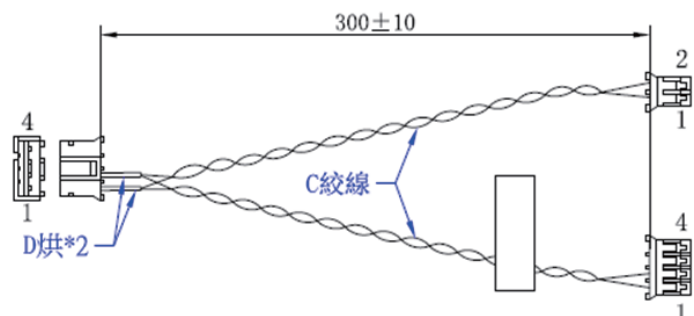

Specification are subject to change without prior notice. ODM / OEM is available.