

# CN063 + CN073


M.2 to 4 Port M.2 B-key (3042/3052) + 4 port Micro SIM Slot converter set

## Introduction:

CN063: 4 x M.2 B-key (3042/3052) + 4 x Micro SIM.

CN073-S5: M.2 B+M key (2242) to USB3.0 signal with SSL interface.

(Pair combination which connects via customized cable)

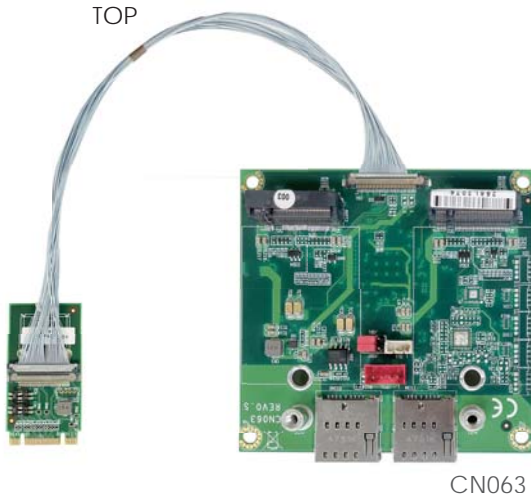

CN063



CN073-S5

## Features:

- Four M.2 B-key 3042 or 3052 size Socket
- Four Micro SIM PUSH-PUSH
- DC 12V to 3.3V or 3.7V by Jumper settings


## Option:

1 x SMBus wafer along with 3 x CIO wafer GPIO pin to reset NGFF devices  
One  $\pm$  2g / 4g / 8g Tri-axis Digital Accelerometer access by USB interface

## Specification:

Function	4 ports M.2 B-key 3042 or 3052 extension board M.2 2242 B+M key to USB signal (CN073-S5)
Interface	USB 3.0/2.0
SIM	4 Micro SIM Card (Push-Push)
USB 3.0/2.0 Connector	SSL01-30L3, SSL 30 pin High Speed Connector
USB 2.0 Connector	1.25mm 1x4pin
DC in Connector	2.0mm 1x4pin
Input Voltage	DC 12V
Operating Temperature	-40°C ~ +85°C
Dimensions	75 x 72 mm (CN063) 22 x 42 MM (CN073-S5)

## Mechanical Drawing:

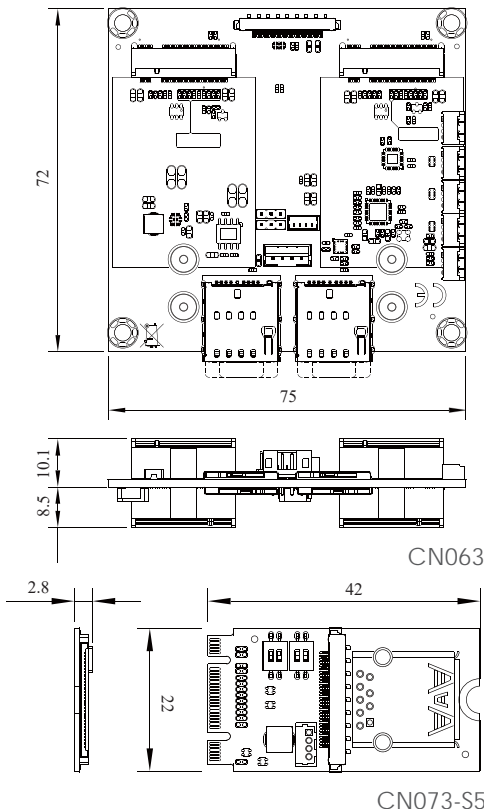

CN063

CN073-S5


## Ordering Information:

6G9101-0076003-0 CN063-003


6G9101-0104001-0 CN073-S5-001

## Cable information:


6G6003-7451-0100 L=30cm, 2.0 1\*4/2.0 1\*4

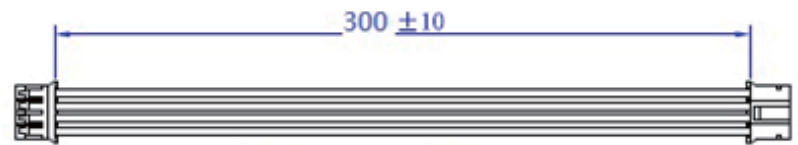

6G6002-8018-0100 L=20cm, 4p/1.25 to 4p/1.25

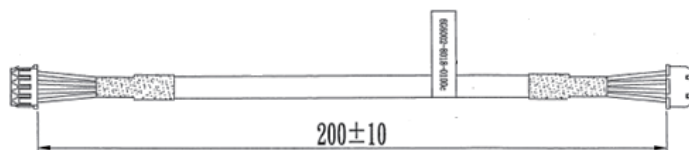

6G6002-8068-0100 SSL20-30SSB-020-B+T1P, L=20cm

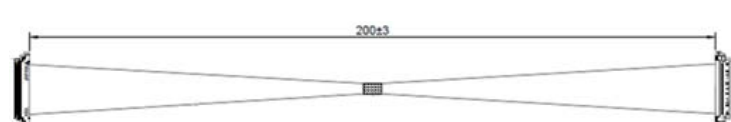

Specification are subject to change without prior notice. ODM / OEM is available.