
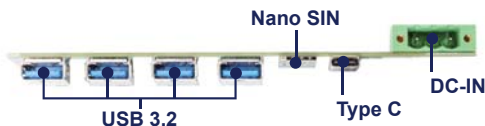


3I140HW


3.5" Embedded SBC supports
Intel® Core™ Ultra Series 1 Meteor Lake U/H CPU
Intel® Core™ Ultra Series 2 Arrow Lake U/H CPU
1 x HDMI®, 1 x LVDS or eDP (BIOS), 1 x Type C, 3 x Intel 2.5Gb Ethernet,
3 x M.2, 1 x High Speed Connector (PCIe x2), 4DI/4DO, 4 x USB 3.2,
3 x USB 2.0, 4 x COM, 1 x Nano SIM, 2 x MIPI-CSI-2, Audio

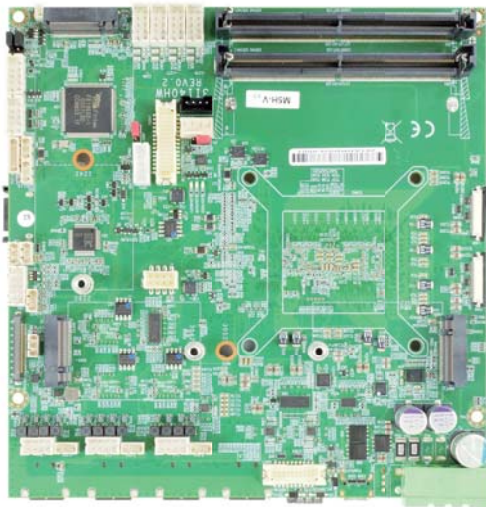

Features:

- Intel® Core™ Ultra Series 1 Meteor Lake U/H CPU
Intel® Core™ Ultra Series 2 Arrow Lake U/H CPU
- 2 x DDR5 SODIMM (Max. 64GB)
- Multiple Independent display:
1 x HDMI®, 1 x LVDS or eDP (BIOS), 1 x Type C
- 3 x Intel 2.5 GbE LAN, 4 x USB 3.2 Gen 1x1, 3 x USB 2.0
- 1 x M.2 M Key, 2 x M.2 BKey, 1 x Nano SIM, 4 x COM
- 1 x High Speed Connector (PCIe x2), 4DI/4DO, Audio
- 2 x MIPI-CSI-2, TPM 2.0, SMBus, I2C

Dimensions: (Unit:mm)

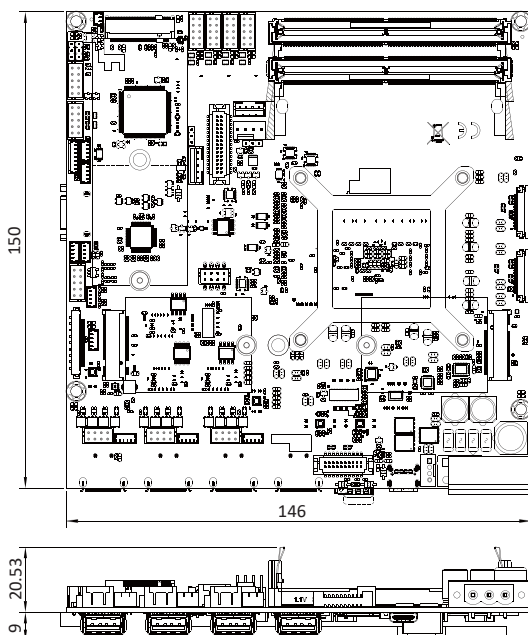

Specifications :

- CPU**
Intel® Core™ Ultra Series 1 Meteor Lake U/H CPU
Intel® Core™ Ultra Series 2 Arrow Lake U/H CPU
- Graphics**
Intel® Arc™ graphics ; Intel® UHD Graphics
- System Memory**
2 x DDR5 SODIMM, Max 64GB
- Storage**
1 x SATA port
1 x M.2 M key Type 2280 / 3080 (OEM to 2242 / 3042), Support NVMe SSD
1 x M.2 B key Type 2242 / 3042, Support SATA SSD
- BIOS**
AMI UEFI BIOS
- Display**
1 x HDMI® (internal) ; 1 x LVDS or eDP (BIOS), 1 x Type C DP ALT Mode
- TPM**
Hardware TPM 2.0 ; OEM Optional to Firmware TPM 2.0
- LAN**
3 x Intel 2.5GbE I226-IT (internal)
- Audio**
High Definition Audio Specification, Support Line-out / Mic-in / Line-in
Two channel Class D Audio Amplifier
- Expansion Interface**
1 x M.2 M key Type 2280 (PCIe x 4), Support NVMe, (OEM to Type 3042)
1 x M.2 B key Type 2242 / 3042 (USB3.2 Gen 1x1 / USB2.0) (OEM to Type 3052)
1 x M.2 B key Type 2242 / 3042 (PCIe / SATA / USB 2.0)
1 x Nano SIM
1 x High Speed connector (PCIe x2)

Expansion Module

Converter Card:

CN064: M.2 B Keyto M.2 E Key 2230, WiFi 6 + BT

- USB**
4 x USB 3. 2 Gen 1 x 1 (external)
1 x Type C USB 3. 2 Gen 1 x 1 (external) (No USB-PD Support) ;
3 x USB 2.0 (internal)
- Serial IO**
4 x RS232 / 422 / 485 (internal) ; eSPI
*COM1~ COM4 pin9 5V / 12V (Option)
- MIPI-CSI**
2 x MIPI-CSI-2 D-PHY
- SMBus / I2C / I2S**
1 x SMBus ; 1 x I2C ; 1 x I2S (OEM)
- GPIO**
Hardware digital Input & Output, 4 x DI / 4 x DO
- WDT**
Hardware Watch Dog Timer, 0~255 sec programmable
- Power Input**
Wide Range DC IN +9~36V
- Dimension**
3.5" Plus (146 x 150 mm) ; Weight: 180g
- Operation Temperature (100% CPU Usage)**
-20°C~+70°C (under specific environmental & CPU power consumption conditions)
-40°C (By OEM request)
- Operation Humidity**
5~95%, non-condensing
- Chassis (OEM I/O Expansion by request)**
Waterproof system, panel pc
- OS Support**
Windows 10 / 11 (64bit)
Ubuntu 24.04.4 LTS, kernel 6.17.0-14-generic

Specification are subject to change without prior notice. ODM / OEM is available.