

# CN063 + CN073


M.2 B+M Key 2242, USB 3.2 to 4 x M.2 B Key 3042/3052 slot with 4\*SIM

## Introduction:

CN063: 4 x M.2 B-key (3042/3052) + 4 x Micro SIM.

CN073-S5: M.2 B+M key (2242) to USB3.0 signal with SSL interface.

(Pair combination which connects via customized cable)

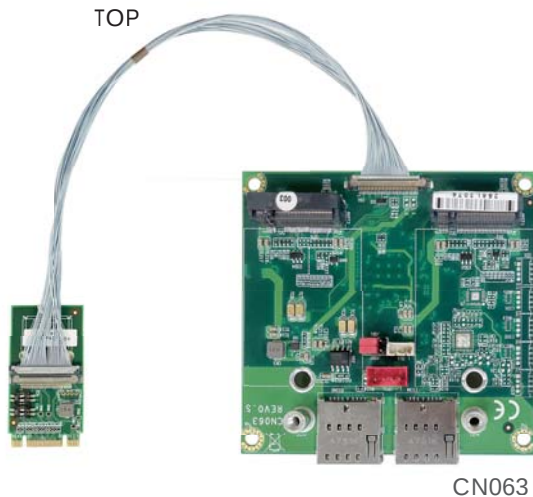


CN063



CN073-S5

## Mechanical Drawing:

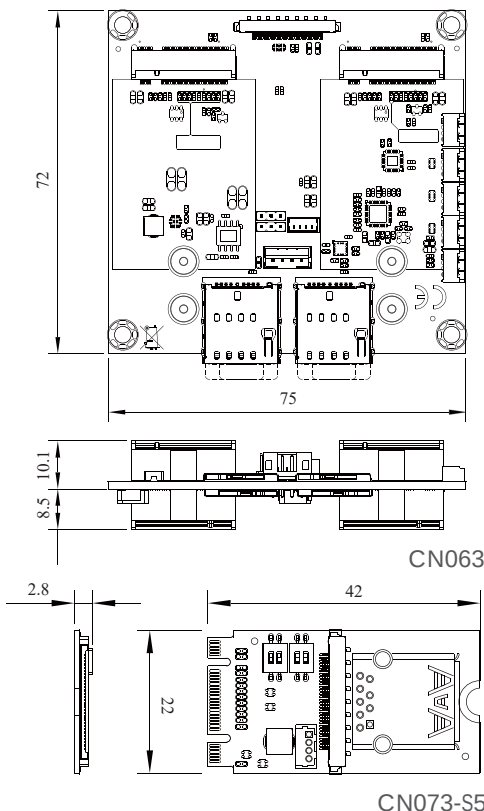

CN063

CN073-S5

## Features:

- Four M.2 B-key 3042 or 3052 size Socket
- Four Micro SIM PUSH-PUSH
- DC 12V to 3.3V or 3.7V by Jumper settings

## Option:

1 x SMBus wafer along with 3 x CIO wafer GPIO pin to reset NGFF devices  
One  $\pm 2g$  /  $4g$  /  $8g$  Tri-axis Digital Accelerometer access by USB interface

## Specification:

|                       |                                                                            |
|-----------------------|----------------------------------------------------------------------------|
| Function              | M.2 B+M Key 2242,<br>USB 3.2 to 4 x M.2 B Key 3042/3052 slot<br>with 4*SIM |
| Interface             | USB 3.0/2.0                                                                |
| SIM                   | 4 Micro SIM Card (Push-Push)                                               |
| USB 3.0/2.0 Connector | SSL01-30L3,<br>SSL 30 pin High Speed Connector                             |
| USB 2.0 Connector     | 1.25mm 1x4pin                                                              |
| DC in Connector       | 2.0mm 1x4pin                                                               |
| Input Voltage         | DC 12V                                                                     |
| Operating Temperature | -40°C ~ +85°C                                                              |
| Dimensions            | 75 x 72 mm (CN063)<br>22 x 42 mm (CN073-S5)                                |


## Ordering Information:

6G9101-0076003-0 CN063-003


6G9101-0104001-0 CN073-S5-001

## Cable information:


6G6003-7451-0100 L=30cm, 2.0 1\*4/2.0 1\*4

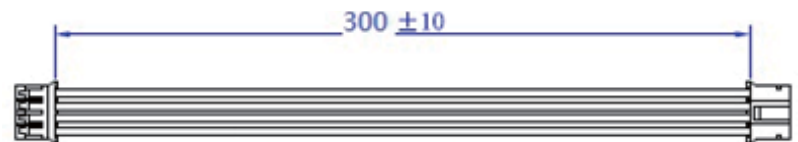

6G6002-8018-0100 L=20cm, 4p/1.25 to 4p/1.25

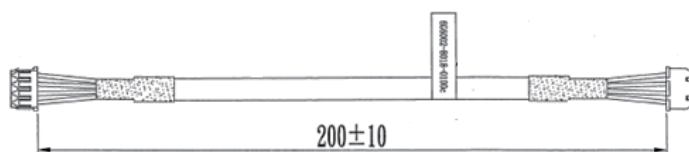

6G6002-8068-0100 SSL20-30SSB-020-B+T1P, L=20cm



Specification are subject to change without prior notice. ODM / OEM is available.